


# PERFORMANCE LITE IP CAMERAS

## 2MP IP IR BULLET CAMERA

### HIB2PI-L

Honeywell's new Performance Lite IP camera series is aimed to provide high quality surveillance as an affordable offering for the small and medium businesses including small retail shops, gyms, schools, residential homes, etc.

The new series includes 2MP IR cameras, HIB2PI-L, in bullet configuration, with fixed lens option and plastic body to cater to all kinds of customer applications. The cameras come with IR LEDs to provide effective and efficient surveillance even during the night. The cameras are IP67 rated which makes them resilient for outdoor applications as well.

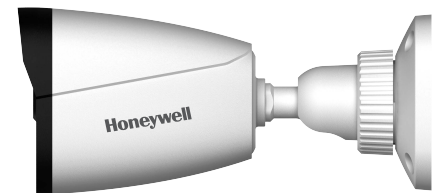

Sensor



Min.  
Illumination




DWDR




Motion  
Detection



Day & Night



AWB



POE



Water-proof

### KEY FEATURES

- 2MP, Resolution: 1920 X 1080, H.265 codec compression
- Up to 20 m IR distance
- 3D DNR, Digital WDR, HLC, BLC, defog
- ICR auto switch, true day / night (TDN), ROI coding
- IP 67 certified
- Supports dual streams
- Support mobile surveillance by smart phones with iOS and Android OS access through Honeywell NVR.

# PERFORMANCE LITE IP CAMERAS 2MP IP IR BULLET CAMERA

## SPECIFICATIONS


CAMERA		HIB2PI-L
Image Sensor		1 / 3.2"CMOS
Number of Pixels (H x V)		1920 x 1080
Electronic Shutter Speed		1/25s~ 1/ 100000s
Iris		Fixed Iris
Min Illumination		0.012lux @F1.2, AGC ON; 0 lux with IR 0.046 lux @ F2.0, AGC ON; 0 lux with IR
Lens		3.6 mm @F2.0, (fixed lens), Horizontal Field of View: 75.8°
Day & Night		TDN
Wide Dynamic Range		Digital WDR
IMAGE		
Video Compression		H.265 / H.264 / MJPEG
Resolution		1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, 480 × 240, CIF
Number of Streams		2 (Main Stream, Sub Stream)
Frame Rate		Main Stream: 60Hz:1080P/720P(1~30fps); 50Hz: 1080P/720P(1~25fps) Sub Stream: 60Hz: D1/CIF/480×240(1~30fps); 50Hz: D1/CIF/480×240 (1~25fps)
Bit Rate		64 Kbps ~ 6Mbps
Encode Mode		VBR / CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
ROI		3, Each ROI to be configured separately
INTERFACES		
Network		RJ45
FUNCTIONS		
Remote Monitoring		Web browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 3 users; Support multi-stream real time transmission
Network Protocol		UDP, IPv4, IPv6, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, 802.1x, UPnP, HTTP, HTTPS, QoS
Interface Protocol		ONVIF
Motion Alarm		Supported
IR Distance		10 ~ 20m
IP Rating		IP67

# PERFORMANCE LITE IP CAMERAS 2MP IP IR BULLET CAMERA

OTHERS	HIB2PI-L
Power Supply	DC 12V / PoE
Power Consumption	<5 W
IR Consumption ON	1 W
Operating Temperature	-20 deg C to 55 deg C, Humidity< 95% (non-condensing)
Dimensions (mm)	162.1 × 74.8 × 73.8
Weight	Approx. 0.24KG
Installation	Ceiling mounting; Wall mounting
Certifications	BIS, CE, FCC

## DIMENSIONS

### HIB2PI - L

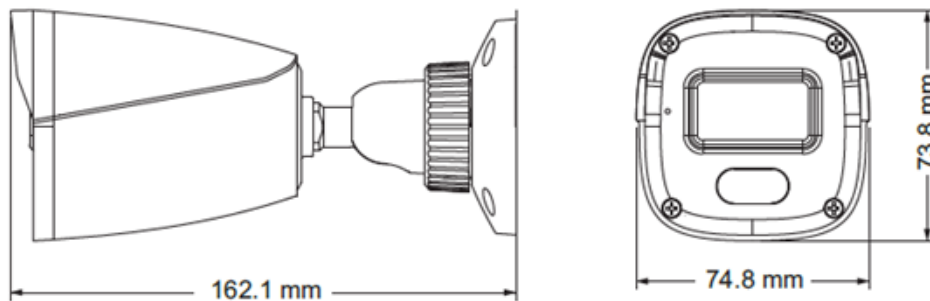

## ORDERING INFORMATION

ORDER CODES	DESCRIPTION
HIB2PI - L	1/3.2" CMOS Sensor, 2 MP Fixed lens, TDN, DWDR, 3.6 mm, 12 VDC / PoE

For more information,  
<https://honeywellbuildings.in>  
 Call: 1-800-103-0339  
 Email: HBT-Indiabuildings@honeywell.com

**Honeywell HBT India Buildings**  
 Unitech Trade Center, 5th Floor, Sector-43,  
 Block C, Sushant Lok Phase - I,  
 Gurgaon - 122 002

[www.honeywell.com](http://www.honeywell.com)

© 2020 Honeywell International Inc.

**PERFORMANCE LITE IP CAMERAS  
 2MP IP IR BULLET CAMERA**

**Honeywell**