



Analog

Bullet

SCO-6085R

2MP Analog IR Bullet Camera



Key Features

- Full HD(1920 x 1080) resolution
- 0.11Lux@F1.6, 0Lux(B/W IR LED on)
- 3.2~10mm(3.1x) varifocal lens
- Day & Night (ICR), DWDR< Motion detection
- IR viewable length 30m, IP66, IK10
- Transmission distance max. 500m
- Easy installation (Plug & play)

Compatible Accessories (Optional)



SBO-100B1



SBP-302PM

SCO-6085R

2MP Analog IR Bullet Camera



Specifications

Video

Imaging Device	1/2.8" 2M CMOS
Min. Illumination	Color: 0.11Lux (F1.6, 1/30sec) BW: 0Lux(IR LED on)
Video Out	BNC(AHD / CVBS Selectable)
Video Transmission Distance	500m(5C2V Coaxial Cable)

Lens

Focal Length (Zoom Ratio)	3.2~10mm(3.1x) manual varifocal
Max. Aperture Ratio	F1.6
Angular Field of View	H: 110.2°(Wide)~32.0°(Tele) / V: 55.4°(Wide)~18.0°(Tele) / D: 128.4°(Wide)~36.6°(Tele)
Min. Object Distance	0.5m(1.64ft)
Focus Control	Manual
Lens Type	DC auto iris

Operational

Camera Title	Displayed 15 characters
Day & Night	Auto(ICR)
Backlight Compensation	BLC, HLC, DWDR
Digital Noise Reduction	SSNRIV
Defog	Support
Motion Detection	4ea
Privacy Masking	8ea
Gain Control	Low / Middle / High / Very high
White Balance	ATW / AWC / Manual / Indoor / Outdoor
Electronic Shutter Speed	1~1/12,000sec
Video Rotation	H-Rev/V-Rev
Analytics	Motion detection
Alarm I/O	Output 1ea
Alarm Triggers	Analytics
Alarm Events	Alarm output
IR Viewable Length	30m(98.42ft)
Coaxial Protocol	ACP(AHD Coax Protocol), CVBS: Pelco-C(Coaxitron)

Environmental & Electrical

Operating Temperature / Humidity	-30°C ~ +55°C (-22°F ~ +131°F) / Less than 90% RH
Certification	IP66, IK10
Input Voltage	24VAC, 12VDC
Power Consumption	24VAC: Max 5.4W, typical 3.4W 12VDC: Max 5.4W, typical 3.4W


Mechanical

Color / Material	Dark grey / Aluminum
Product Dimensions / Weight	Ø78x259.8mm(3.07x10.23"), 887g(1.95 lb)

2MP Analog IR Bullet Camera



Unit: mm [inch]

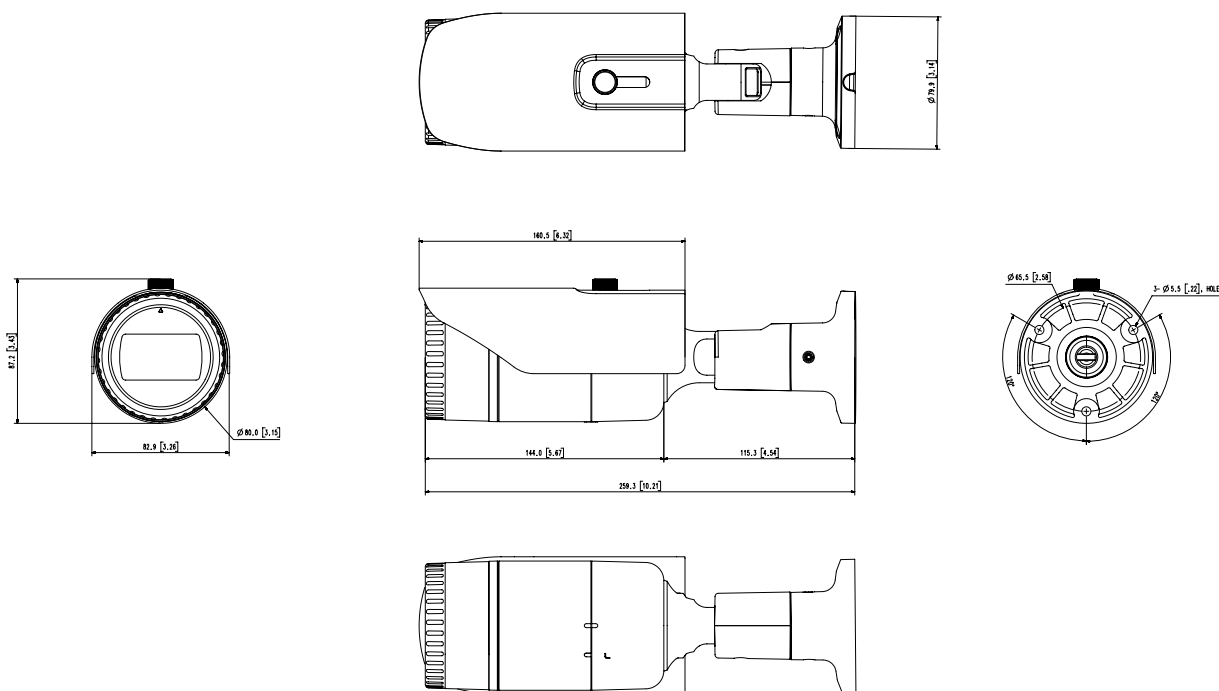

Apperance SCO-6085R, SCO-6085RVP, SUO-6085R
UNIT : mm[inch]